SPECIFICATION SHEET

EMPACHER

customer: **nation:** **date:**
phone:
fax:
e-mail :
signature of customer: _____

requested date of delivery:

type of boat: **mould no.:**

crew weight (average):
.....kg

coxswain:
☐ sitting in stern (four, eight)
☐ lying in bow (pair, four)

section: yes / no (seat no. 6 / 7)

length of tracks: (track without stoppers)
standard = 83 cm
other length: .....

sliding seat:
☐ cedar wood
☐ carbon (with holes)

☐ without holes
☐ with holes
☐ ball-bearing

☐ standard height
☐ medium (7mm lower)
☐ low (12 mm lower)
☐ high (5mm higher)
☐ extra high (10mm higher)

gates: Emp. insert gates ☐
other: .....

outrigger dimensions (s. sketch):
Oarlock set in middle position
K-type rigger in height twice adjustable with 1cm

	skull	sweep
a) height starboard (left hand) :	...../.....cm	
height portside (right hand) :	...../.....cm	.....cm
b) spread:	.....cm	.....cm

steering shoe: seat no.: .....
☐ right foot
☐ left foot

shoe sizes: (English sizes)

Seat no.:			
1	=	5	=
2	=	6	=
3	=	7	=
4	=	8	=

electr. system:
☐ wiring only
☐ complete
☐ **cox-box**
☐ **speedcoach** → ☐ standard ☐ gold ☐ XL
☐ **strokecoach**

boat cover:
☐ cotton
☐ polyamide partly padded
☐ polyamide fully padded
cover for outrigger: qty.: .....

rigging:

normal: pt stb	italien. stb stroke:	italien. pt stroke:	or:
○	○	○	○
bow	bow	bow	bow

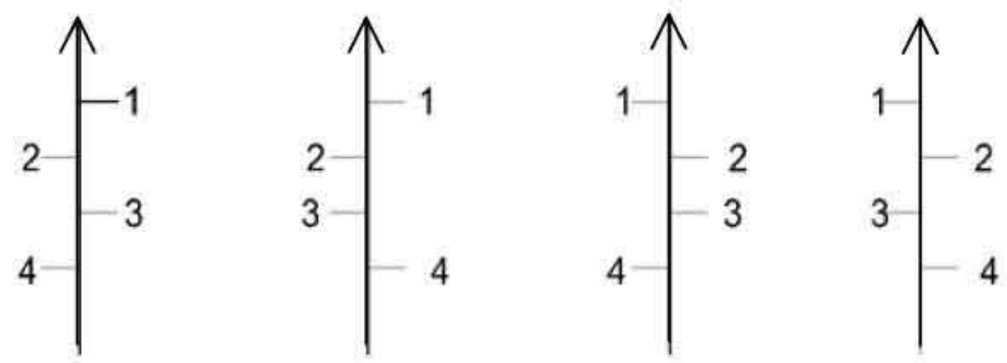

sketch for outrigger dimensions:

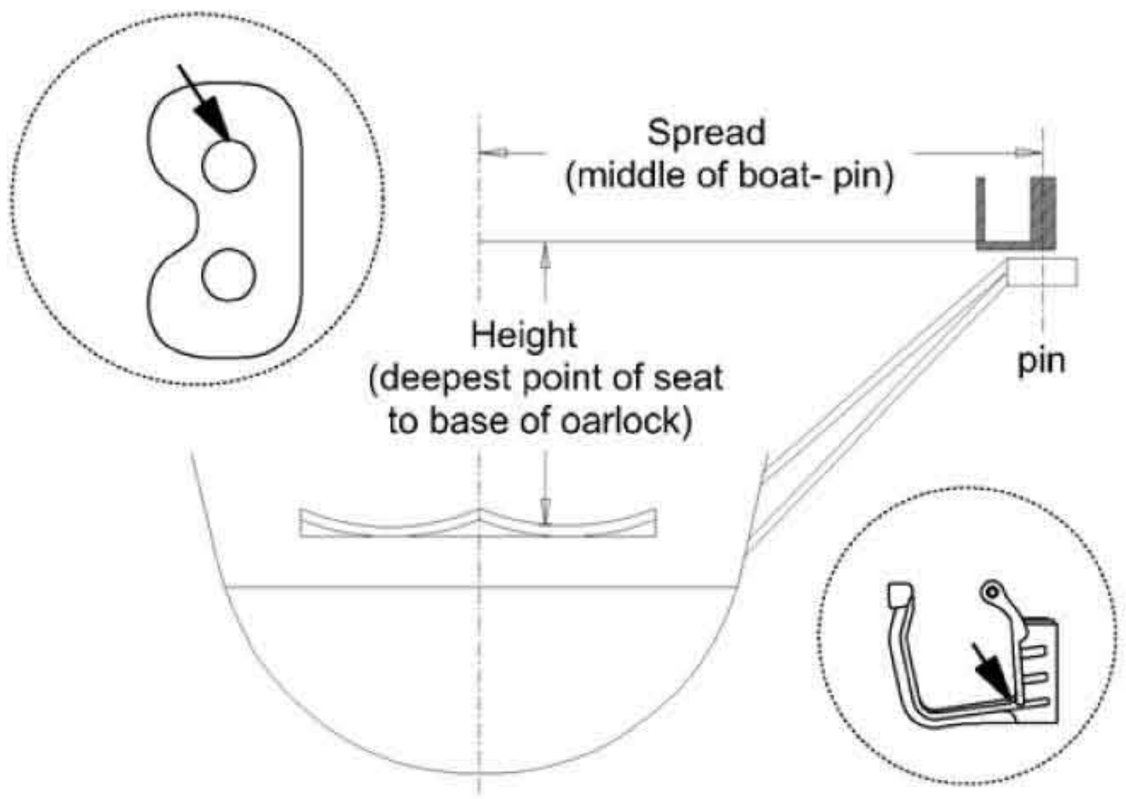

optionals:
☐ round carbon profiles at canvas
☐ carbon fin / carbon fin rudder
☐ steering device integrated inside canvas
☐ carbon half-moon, junction between starboard and portside (*for K,S boats only*)
☐ reinforcement at shoulders with additional carbon profiles (caps) at both sides (*for K,S boats only)*

remarks / special requests:

Jan 07