


SPECIFICATION SHEET



customer : nation: date:
 phone : address:
 fax : signature of customer:
 e-mail : requested date of delivery:


type of boat: mould no.:
crew weight (average):kg
rigger scull: X C R
rigger sweep: X C R
coxswain: sitting in stern (four, eight)
 lying in bow (pair, four)
section: yes / no (seat no. 6 / 7)

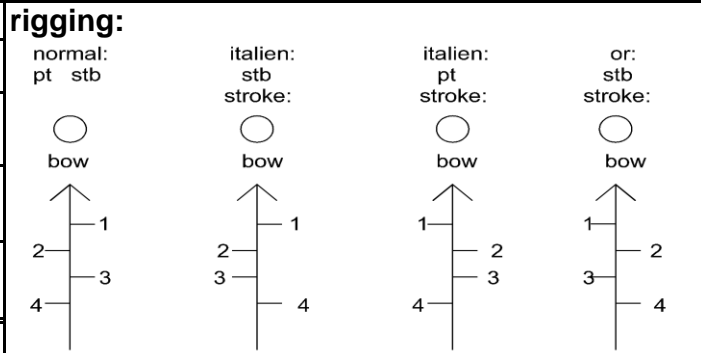

tracks, type and length
 concav standard length = 83cm
 convex (new) other length.....cm

sketch for outrigger dimensions:

sliding seat
 carbon with oval recesses
 carbon with big holes
 standard height
 medium (5mm lower)
 low (10mm lower)
 high (5mm higher)
 extra high (10mm higher)
 height adjustable

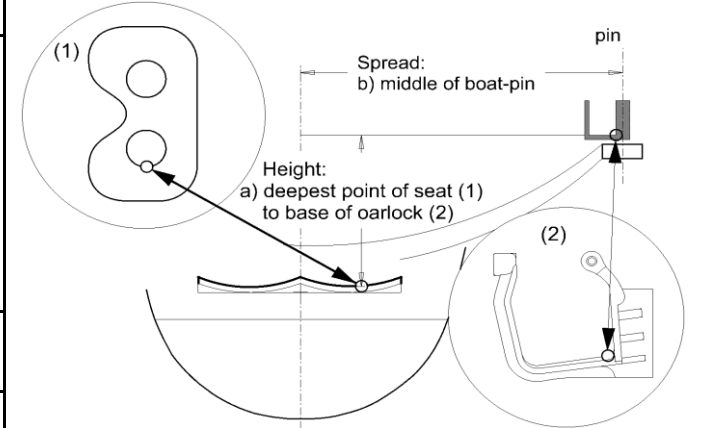

single scull stretcher side mounted at holes
adjustment mounted on ratchet tracks on consoles
gates: Emp. insert gates:
 other:.....

optionals:

outrigger dimensions (s. sketch):
 oarlock set in middle position

	scull	sweep
a) height starboard (left hand):cmcm
height portside (right hand):cmcm
b) spreadcmcm

- round carbon profiles at canvas
- carbon fin "model 2024" with standard rudder
- carbon fin "model 2024" with full length rudder
- steering device integrated inside canvas
- Textrem decks incl. calf recesses
- high performance edition
Textremdecks incl. calf recesses and carbon layer inside
- Carbon ratchet tracks and stretcher pipe
(can only be ordered with round carbon profiles at canvas)
- full carbon stretcher with 4° vertical curve
- carbon shoeplate for variable shoe angle

steering shoe right foot
 seat no.: left foot

remarks / special requests:

shoe sizes: seat no.:
 1 = 5 =
 (EU sizes) 2 = 6 =
 3 = 7 =
 4 = 8 =

electr. system:
 CoxBox cplt. CoxBox GPS cplt.
 CoxBox wiring only speaker numb.:...
 StrokeCoach Surge
 SpeedCoach GPS2 + Tr. P.
 only bracket for SpeedC. or StrokeC. T-bracket A-bracket

boat cover: polyester, PVC coated, with zip
cover for outrigger: qty.: